

Technical specification Transformer

SGB Czech Trafo s.r.o.

Type: DTTHZ2N

	HV	LV	
Technical Data	Rated Capacity AN	630 kVA	630 kVA
	Voltage	11000 V	420 V
	Vector group	D	yn11
	Tappings	+2x2,5%	
	Tappings	-2x2,5%	
	Winding material	Al	Al
	Insulation class	F	F
	Type of insulation	Casted	Prepreg
	Relations impedance (Uk)		HV – LV
	Impedance voltage Uk		6 %
	Tolerance	+/- 10 %	
Test level	Average temperature rise	100 K	100 K
	Highest voltage of equipment (Um)	12 kV	1,1 kV
	Alternating voltage	28 kV	3 kV
	BIL	75 kV	0 kV
Losses	No load losses	990 W	0 % tolerance Ecodesign Directive 2009/125/EC - Tier 2
	Load losses at 120°C	7100 W	0 % tolerance
Technical Data II	Design by norm	IEC 60076-11:2018	
	Number of phases	3	
	Frequency	50 Hz	
	LWA/LPA from 1 m	61 / 48 dB(A)	0 dB(A) tolerance
	Protection degree Transformer	IP00	
	Hardly flammable self-extinguishing	Yes	
	Surge voltage - / short circuit proofed	Yes	
	Short circuit duration	2 s	Short-circuit power 500 MVA
	Fire-/Climatic-/ Environment class	F1/C2/E2	
	Ambient temperature min/max	-25/40°C	
	Max. Installation altitude	1000 m	

Dimensions

Transformer

Weight: 1850 kg



a 1380 mm

b 860 mm

c 1550 mm

d 670 mm

e 670 mm

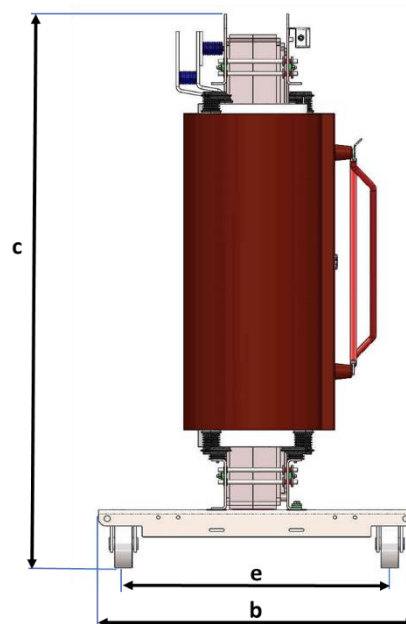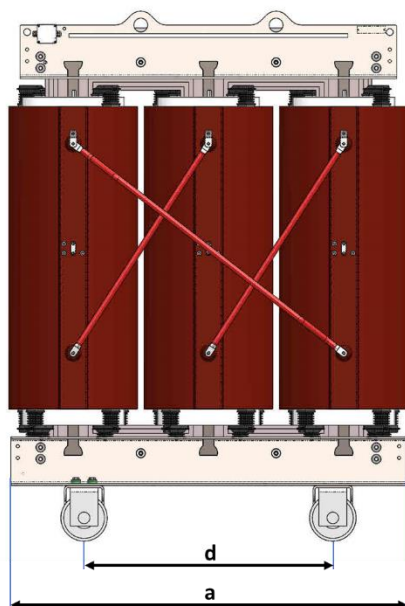

Included tests

Routine testing IEC 60076-11:2018 each transformer:

Winding resistance

Voltage ratio and phase displacement

Impedance of the load and losses

No load losses and no-load current

Separate Source AC withstand voltage test

Induced AC withstand voltage test

Insulation resistance

Partial discharge test

Included accessories